



该说明书请保留备用

RECYCLABLE

C-Lin 欣灵

XLGL系列-负荷隔离开关 40~100A 使用说明书


欣灵电气股份有限公司

C-Lin

欣灵电气股份有限公司
XINLING ELECTRIC CO., LTD

地址：浙江乐清经济开发区纬十九路328号/浦南五路55号
热线：0577-62735555 传真：0577-62722963
Http: //www.c-lin.cn Email: xl@xinling.com
技术服务热线：400 1663 188

正面柜外操作 Front operation outside the cabinet

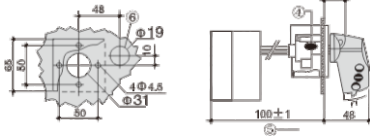


- ▶ 手柄锁具滑动锁舌宽30mm
- ▶ 带加长连轴的最小长度：125 ± 1mm
- ▶ 手柄锁具开孔
- ▶ The width of sliding dead bolt of handle lock is 30mm.
- ▶ The min length of extension shaft is 125 ± 1mm
- ▶ Hole of handle lock

4

XLGL-40~63A


正面直接操作 Front direct operation

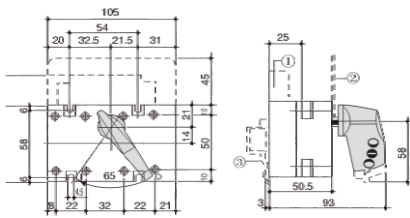

- ▶ 常开/常闭预断开辅助触点
- ▶ 端子护屏
- ▶ DIN轨道固定用的夹子
- ▶ NO/NC pre-breaking auxiliary contact
- ▶ Terminal barrier
- ▶ Clamp for fixing DIN rail

1

正面柜外操作 Front operation outside the cabinet

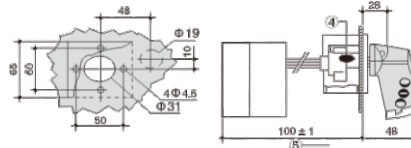


- ▶ 手柄锁具滑动锁舌宽30mm
- ▶ 带加长连轴的最小长度：125 ± 1mm
- ▶ The width of sliding dead bolt of handle lock is 30mm.
- ▶ The min length of extension shaft is 125 ± 1mm

2

XLGL-80~100A

正面直接操作 Front direct operation

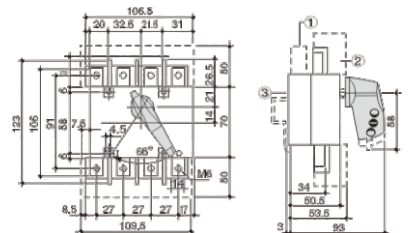

- ▶ 预断开辅助触点
- ▶ 端子护屏
- ▶ DIN轨道固定用的夹子
- ▶ Pre-breaking auxiliary contact
- ▶ Terminal barrier
- ▶ Clamp for fixing DIN rail

3